



Parts Included

Number	Quantity	Item Description	Part#
1	1	Driver Rear Shock	DK-631889R RL
2	1	Passenger Rear Shock	DK-631889R RR

Please check that all items are present before installation. If for any reason there is an item or items missing send an email to sales@dirtking.com with proof of purchase and a picture of parts received.



Before installing, read all instructions. Only certified mechanics should install Dirt King products. Mandatory wheel alignment and ADAS calibration at certified facilities are required after suspension modifications. Failure to do so can lead to handling problems and safety risks. Dirt King is not responsible for damages from improper installation or misuse. Adhere to your vehicle manufacturer's recommendations. For more information, visit <https://dirtking.com/pages/disclaimer>

Step 1: Disassembly

- a. Remove upper and lower shock mounting hardware. Do not discard any hardware.
- b. Remove shock.

Step 2: Assembly


- a. Install new Dirt King shocks using previously removed hardware.
- b. Torque upper and lower bolts to **85ft lbs.**

Note: Refer to images below for reservoir orientation.

Left side of vehicle



Right side of vehicle

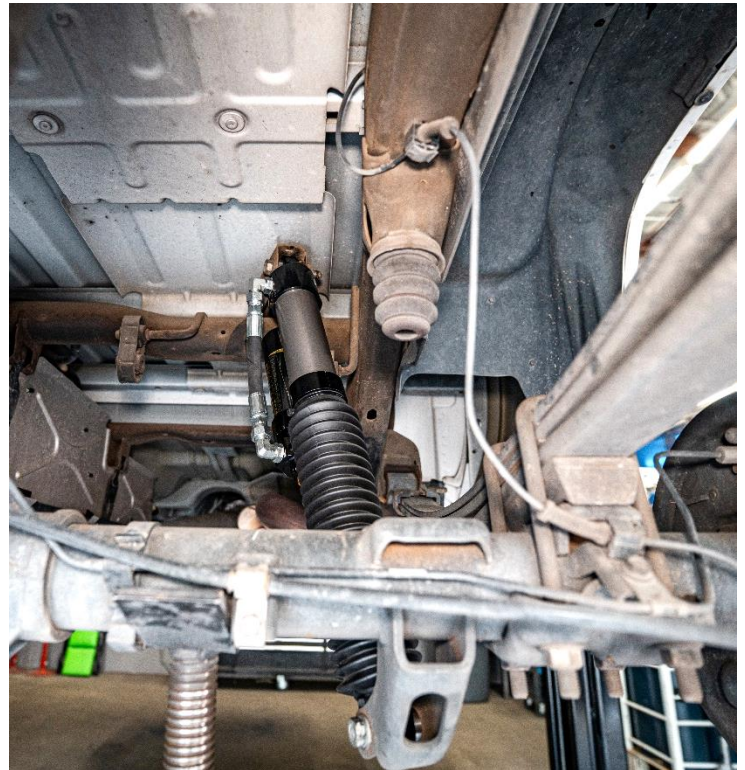

For warnings and disclaimers visit <https://dirtking.com/pages/disclaimer>.